



BusinessMail X.400

Web Interface EDIBOX User V2.1

Erleben, was verbindet.



BusinessMail X.400

Web Interface

Trading Partner EDI

Web Interface EDIBOX user (General 1)

- Up to now it was necessary to use special forms or Excel sheets for the administration of your partners and trading relations. You have to send this information to central Administration of BusinessMail X.400 who enabled those changes.
- While using the new Web interface (WebConfig) you will be able to directly manage your trading relations without any time lost.
- To access WebConfig the first time it is necessary to download a client certificate stored on URL <http://www.service-viat.de> and import it into certificate store of your OS/ browser. If you use different client certificates you have to use this new certificate while setting up the communication to WebConfig.



BusinessMail X.400

Web Interface

Trading Partner EDI

Web Interface EDIBOX user (General 2)

- For first login into WebConfig, you may use the Login data (User name, Password) of your mailbox account (**not FTP Login data!**), but you have to set a new password. This password is only valid for WebConfig and not for the mailbox access. After that, you are able to use authentication with personalized client certificate.
- Please contact Helpdesk of BusinessMail X.400 if you don't have access to Mailbox login data. The first registration is free of charge.



BusinessMail X.400

Web Interface

Trading Partner EDI

New features in WebConfig since V1.7

- Instead to login into WebConfig via username and password you now may use a personalized client certificate for authentication. You may download this certificate in menu item WebConfig Management – Downloads.
- You may find information about those messages not delivered to your EDIBOX in menu “EDI Relation :: Overrun”. Here you’re able to check the message header and also the content of first body part.
- You may now add a comment for each relation entry. The value of comment will be used by search mechanism within select relation menu (modify, delete) to reduce the number of displayed entries.




BusinessMail X.400

Web Interface

Trading Partner EDI

Secure Communication via Internet (https)

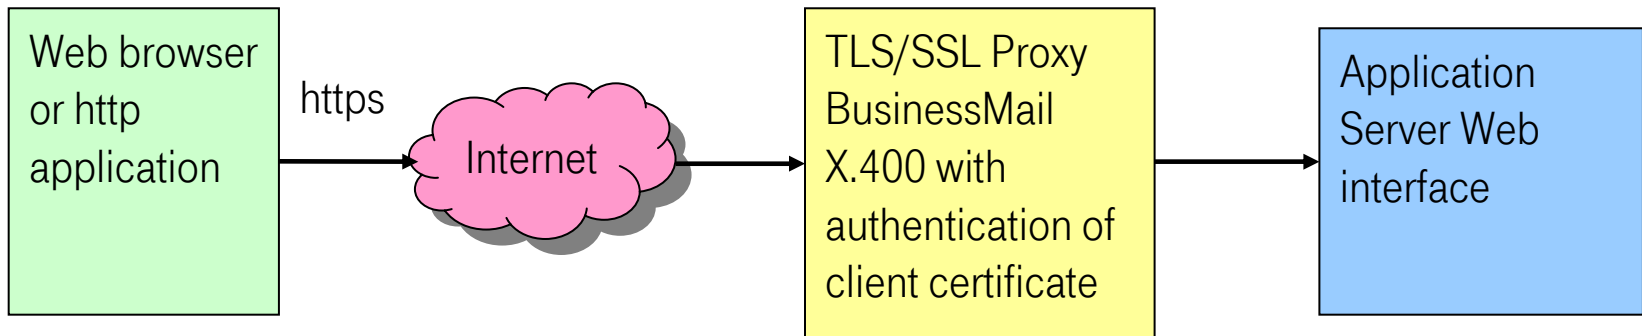

Address <https://webconfig.viat.de/webconfiglogin/>



BusinessMail X.400

Web Interface

Trading Partner EDI

Management of EDIBOX properties and relations

WebConfig will offer the following features :

- Modify Mailbox login data (Password, Reset Counter Login failure -> reactivate Mailbox access)
- Information about mailbox (last login date, last logoff date, number of messages)
- Management of trading relations in central EDI function
- Manage SMTP Filter/Partner
- Download Data for example Client Certificate for access to WebConfig or WebDAV or parameter files
- Information about messages not delivered to your EDIBOX



BusinessMail X.400

Web Interface

Trading Partner EDI

Login information (1)

Erleben, was verbindet.



■ WebConfig Management
■ Mailbox Management
■ EDI Relation
■ SMTP Filter
■ Service
■ Logout

BusinessMail X.400 :: WebConfig **editester (49638)**

Your WebConfig certificate is valid until **4.02.2013** (886 day/s left)

News 🗨️

Attention: The general client certificate has to be replaced until 6th of October 2010.
Download it at "<http://www.service-viat.de/html/web-konfigurationsoberflache.html>".
You now have the possibility to login into WebConfig via user defined certificate.
Also for P7 access authentication via certificate is now available.

You now have the option to add a comment for each EDI relation. If you enter a comment
this entry will be also used for the filter mechanism when listing relations (modify, delete).

- When login into WebConfig, you'll find some information about new features or changes in GUI.
- You may select one of the flags to change the language of GUI.



BusinessMail X.400

Web Interface

Trading Partner EDI

Login information (2)

 Erleben, was verbindet. 



The screenshot shows the BusinessMail X.400 WebConfig interface. The left sidebar contains a menu with the following items: WebConfig Management, Mailbox Management, EDI Relation, SMTP Filter, Service, and Logout. The main content area displays the following information:

- BusinessMail X.400 :: WebConfig editester (49638)
- Your WebConfig certificate is valid until **4.02.2013** (886 day/s left)
- News** 
- Attention: The general client certificate has to be replaced until 6th of October 2010. Download it at "<http://www.service-viat.de/html/web-konfigurationsoberflache.html>". You now have the possibility to login into WebConfig via user defined certificate. Also for P7 access authentication via certificate is now available.
- You now have the option to add a comment for each EDI relation. If you enter a comment this entry will be also used for the filter mechanism when listing relations (modify, delete).

- If you use a personalized client certificate while log into WebConfig, you will see an information how long this certificate is valid.
- If you had logged in via personalized certificate and then log out you'll see the login window with username and password. If you would like to log in again, you have not to enter a value only press "Login" button.


BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management - Overview

Erleben, was verbindet.

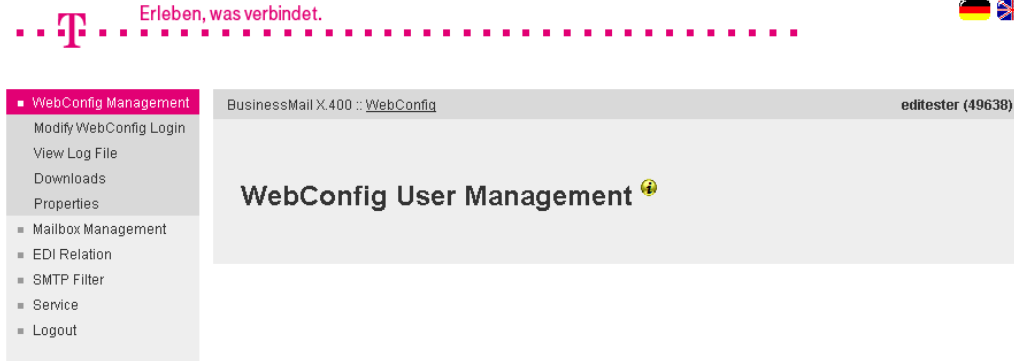

Management of WebConfig account

- Modify Login data
- View Log file
- Download Data (Certificates, Parameter files)
- Properties: Language, time zone and separator of CSV files, life time of Cookies



BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management – Modify Login (1)

The screenshot shows the BusinessMail X.400 WebConfig Management interface. At the top, there is a logo and the slogan "Erleben, was verbindet." followed by German and UK flags. The main content area is titled "WebConfig Management :: Modify Login Data" and contains a checkbox for "Authenticate user automatically". Below this is a section titled "Authenticate user automatically" with explanatory text and a link to a "Download area". Further down is a "Modify Password" section with three input fields for "Old Password", "New Password", and "Repeat Password". At the bottom are "Ok" and "Cancel" buttons.

- In this menu item you may enable the log in via personalized certificate (Authenticate user automatically) or change the password of your WebConfig account. We recommend a password length of at minimum 8 digits using letters, numbers and special characters.
- Only the central administration is able to change the WebConfig Logonname. Please contact Helpdesk if you have such a request.




BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management – Modify Login (2)

Erleben, was verbindet.

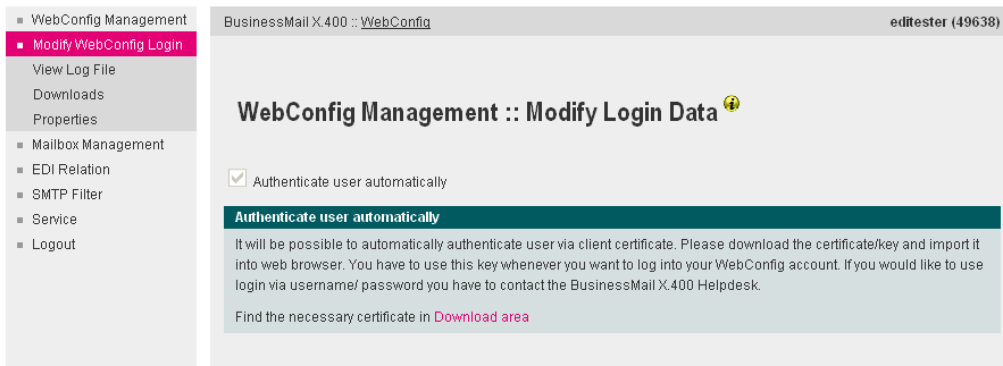

WebConfig Management

- WebConfig Management
 - Modify WebConfig Login
 - View Log File
 - Downloads
 - Properties
- Mailbox Management
- EDI Relation
- SMTP Filter
- Service
- Logout

BusinessMail X.400 :: WebConfig editester (49638)

WebConfig Management :: Modify Login Data

Authenticate user automatically

Authenticate user automatically

It will be possible to automatically authenticate user via client certificate. Please download the certificate/key and import it into web browser. You have to use this key whenever you want to log into your WebConfig account. If you would like to use login via username/ password you have to contact the BusinessMail X.400 Helpdesk.

Find the necessary certificate in [Download area](#)

- If you enable “authenticate user automatically” you’ll get the information that you need a personalized certificate. If you did not download and install this certificate, you should not continue.
- If the feature “authenticate user automatically” is enabled, only the Helpdesk is able to disable this feature or to revoke compromised certificates.
- The Helpdesk will also enable your WebConfig account if it is temporary locked because of Login failures.




BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management – View Log File

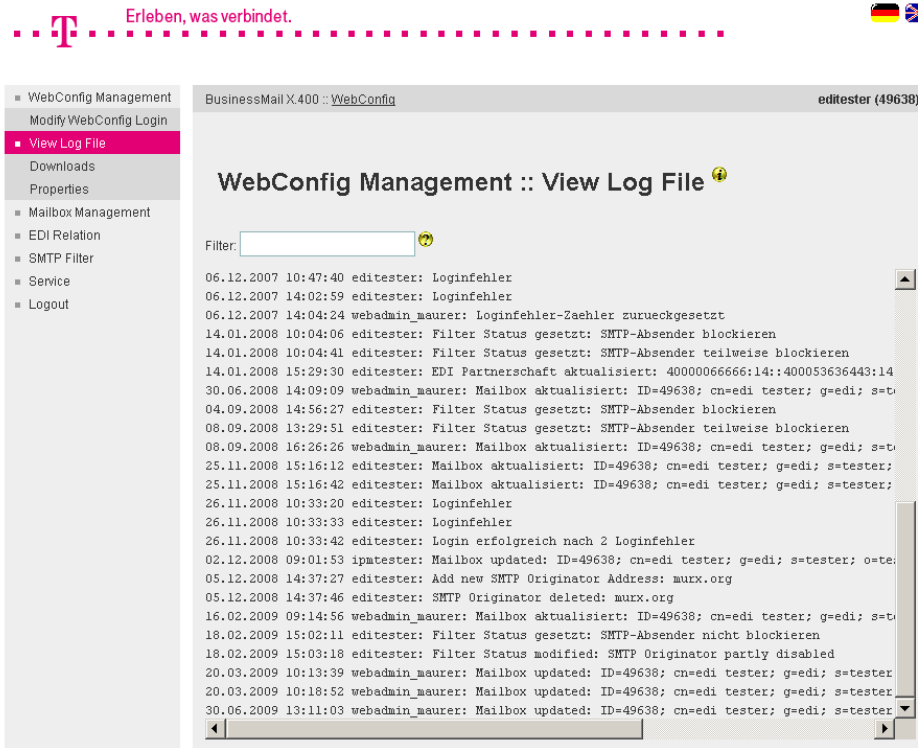

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

WebConfig Management :: View Log File

Filter:

```
06.12.2007 10:47:40 editester: Loginfehler
06.12.2007 14:02:59 editester: Loginfehler
06.12.2007 14:04:24 webadmin_maurer: Loginfehler-Zaehler zurueckgesetzt
14.01.2008 10:04:06 editester: Filter Status gesetzt: SMTP-Absender blockieren
14.01.2008 10:04:41 editester: Filter Status gesetzt: SMTP-Absender teilweise blockieren
14.01.2008 15:29:30 editester: EDI Partnerschaft aktualisiert: 40000066666:14:400053636443:14
30.06.2008 14:09:09 webadmin_maurer: Mailbox aktualisiert: ID=49638; cn=edi tester; g=edi; s=t
04.09.2008 14:56:27 editester: Filter Status gesetzt: SMTP-Absender blockieren
08.09.2008 13:29:51 editester: Filter Status gesetzt: SMTP-Absender teilweise blockieren
08.09.2008 16:26:26 webadmin_maurer: Mailbox aktualisiert: ID=49638; cn=edi tester; g=edi; s=t
25.11.2008 15:16:12 editester: Mailbox aktualisiert: ID=49638; cn=edi tester; g=edi; s=tester;
25.11.2008 15:16:42 editester: Mailbox aktualisiert: ID=49638; cn=edi tester; g=edi; s=tester;
26.11.2008 10:33:20 editester: Loginfehler
26.11.2008 10:33:33 editester: Loginfehler
26.11.2008 10:33:42 editester: Login erfolgreich nach 2 Loginfehler
02.12.2008 09:01:53 ipmtester: Mailbox updated: ID=49638; cn=edi tester; g=edi; s=tester; o=te
05.12.2008 14:37:27 editester: Add new SMTP Originator Address: murx.org
05.12.2008 14:37:46 editester: SMTP Originator deleted: murx.org
16.02.2009 09:14:56 webadmin_maurer: Mailbox aktualisiert: ID=49638; cn=edi tester; g=edi; s=t
18.02.2009 15:02:11 editester: Filter Status gesetzt: SMTP-Absender nicht blockieren
18.02.2009 15:03:18 editester: Filter Status modified: SMTP Originator partly disabled
20.03.2009 10:13:39 webadmin_maurer: Mailbox updated: ID=49638; cn=edi tester; g=edi; s=tester
20.03.2009 10:18:52 webadmin_maurer: Mailbox updated: ID=49638; cn=edi tester; g=edi; s=tester
30.06.2009 13:11:03 webadmin_maurer: Mailbox updated: ID=49638; cn=edi tester; g=edi; s=tester
```

- In Log file you'll see all activities in relation/filter management. Each entry shows a time stamp, the name of initiator and the relation.
- While entering a search string, you may reduce the number of displayed entries.




BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management – Downloads (1)

Erleben, was verbindet.

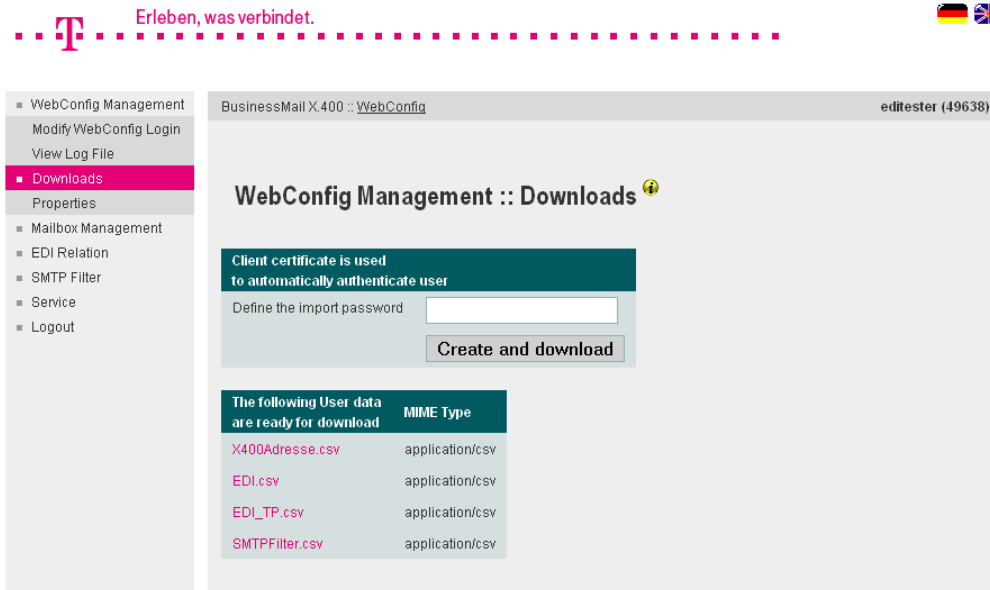

The following User data are ready for download	MIME Type
X400Adresse.csv	application/csv
EDI.csv	application/csv
EDI_TP.csv	application/csv
SMTPFilter.csv	application/csv

- In this menu item you have the possibility to download different types of files.
- Client certificate including private key (*.p12) to log into WebConfig with personalized certificate (automatically authenticate user, certificate is only valid for your User-ID). You may create and download more than one certificate. But if one of those certificate is compromised, the Helpdesk have to revoke all certificates.

BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management – Downloads (2)

Erleben, was verbindet.



BusinessMail X.400 :: WebConfig edltester (49638)

WebConfig Management :: Downloads

Client certificate is used to automatically authenticate user

Define the import password

Create and download

The following User data are ready for download

	MIME Type
X400Adresse.csv	application/csv
EDI.csv	application/csv
EDI_TP.csv	application/csv
SMTPFilter.csv	application/csv

- To create and download the client certificate and private key, it is necessary to enter an import password that has a minimum length of 12 digits and include at minimum one letter, one number and one special character. We recommend to use a password that is as irregular and long as possible.
- To import the configuration (properties and trading relations) into your application you may download parameter files (CSV format).

BusinessMail X.400

Web Interface

Trading Partner EDI

WebConfig Management – Properties

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

WebConfig Management :: Properties

Select file type of downloadable CSV File

Time zone:

List separator:

Common properties

Language:

Maximum life time of cookie: Days

- Format of CSV file (Time zone, separator)
- Language of GUI
- Life time of Cookies



BusinessMail X.400

Web Interface

Trading Partner EDI

Mailbox Management

Erleben, was verbindet.

BusinessMail X.400 : [WebConfig](#) editester (49638)

- WebConfig Management
- Mailbox Management**
- Show/modify Mailbox User
- EDI Relation
- SMTP Filter
- Service
- Logout

Mailbox Management

- Management of Mailbox Properties
- Modify Mailbox password
- Reset Error counter Login



BusinessMail X.400

Web Interface

Trading Partner EDI

Modify Mailbox Properties (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

Mailbox Management: Modify Mailbox Properties

Login Information

Anzahl neuer Nachrichten	0
Anzahl gelisteter Nachrichten	0
Anzahl gelesener Nachrichten	0
Last Login	28.11.2007 07:09:49 UTC
Last Logoff	28.11.2007 07:09:49 UTC
Login Counter / Failures	0 / 0

Reset Login Failures

Profile Data

Status	active
Service Start Date	2007-11-28
VMS-Logon	test

X.400 Address

Country (c)	DE	ADMD (a)	VIAT-TEST	PRMD (p)	
UA ID (n-id)	2049638				
Commonname (cn)	edi tester				
Givenname (g)	edi	Surname (s)	tester		

- Information about last login and last logoff date and the number of messages.
- Information about number of logins and the number of login failures. The failure counter will be reset in case of successful login. If mailbox access is blocked because of login failures, you may reset the counter to enable login.




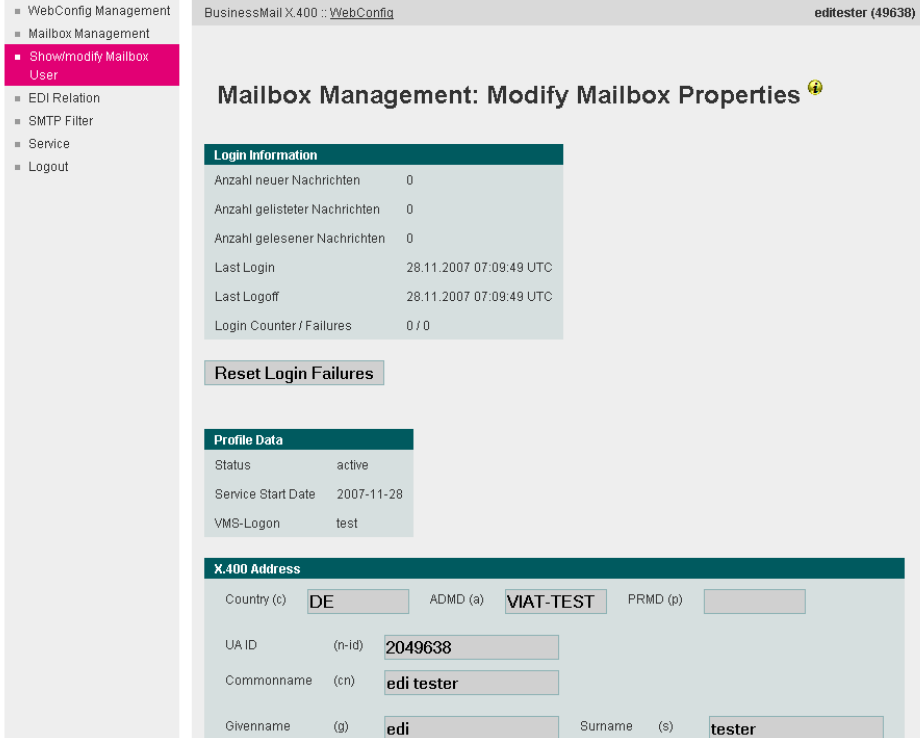
BusinessMail X.400

Web Interface

Trading Partner EDI

Modify Mailbox Properties (2)

Erleben, was verbindet. 



BusinessMail X.400 :: WebConfig editester (49638)

Mailbox Management: Modify Mailbox Properties

Login Information	
Anzahl neuer Nachrichten	0
Anzahl gelisteter Nachrichten	0
Anzahl gelesener Nachrichten	0
Last Login	28.11.2007 07:09:49 UTC
Last Logoff	28.11.2007 07:09:49 UTC
Login Counter / Failures	0 / 0

Reset Login Failures

Profile Data	
Status	active
Service Start Date	2007-11-28
VMS-Logon	test

X.400 Address

Country (c)	<input type="text" value="DE"/>	ADMD (a)	<input type="text" value="VIAT-TEST"/>	PRMD (p)	<input type="text"/>
UA ID (n-id)	<input type="text" value="2049638"/>				
Commonname (cn)	<input type="text" value="edi tester"/>				
Givenname (g)	<input type="text" value="edi"/>	Surname (s)	<input type="text" value="tester"/>		

- You have the possibility to modify your mailbox password. **Only if you are using interactive access (LUA) !**
- When using BUA/FTP (file interface) please contact Helpdesk to change FTP password (see next page).
- You have the possibility to configure the maximum number of login failures.



BusinessMail X.400

Web Interface

Trading Partner EDI

Modify Mailbox Properties (3)

Erleben, was verbindet.

BusinessMail X.400 - WebConfig editester (49638)

- WebConfig Management
- Mailbox Management
- Show/modify Mailbox User
- EDI Relation
- SMTP Filter
- Service
- Logout

Mailbox Management: Modify Mailbox Properties

Login Information

Anzahl neuer Nachrichten	0
Anzahl gelisteter Nachrichten	0
Anzahl gelesener Nachrichten	0
Last Login	28.11.2007 07:09:49 UTC
Last Logoff	28.11.2007 07:09:49 UTC
Login Counter / Failures	0 / 0

Reset Login Failures

Profile Data

Status	active
Service Start Date	2007-11-28
VMS-Logon	test

X.400 Address

Country (c)	DE	ADMD (a)	VIAT-TEST	PRMD (p)	
UA ID (n-id)	2049638				
Commonname (cn)	edi tester				
Givenname (g)	edi	Surname (s)	tester		

- If the access via BUA/FTP (file interface) is configured for your mailbox, you'll see mailbox information including the FTP (VMS) logon name. But you are not able to modify mailbox login.



BusinessMail X.400

Web Interface

Trading Partner EDI

Modify Mailbox Properties (4)

■ Service
■ Logout

Login Information	
Anzahl neuer Nachrichten	0
Anzahl gelisteter Nachrichten	0
Anzahl gelesener Nachrichten	0
Last Login	28.11.2007 07:09:49 UTC
Last Logoff	28.11.2007 07:09:49 UTC
Login Counter / Failures	0 / 0

Reset Login Failures

Profile Data	
Status	active
Service Start Date	2007-11-28
VMS-Logon	test

X.400 Address			
Country (c)	<input type="text" value="DE"/>	ADMD (a)	<input type="text" value="VIAT-TEST"/>
		PRMD (p)	<input type="text"/>
UA ID (r-id)	<input type="text" value="2049638"/>		
Commonname (cn)	<input type="text" value="edi tester"/>		
Givenname (g)	<input type="text" value="edi"/>	Surname (s)	<input type="text" value="tester"/>
Organisation (o)	<input type="text" value="testag"/>		
Org Unit 1 (ou1)	<input type="text"/>	Org Unit 2 (ou2)	<input type="text"/>
Org Unit 3 (ou3)	<input type="text"/>	Org Unit 4 (ou4)	<input type="text"/>

- Show configure X.400 address of Mailbox




BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation

Erleben, was verbindet.

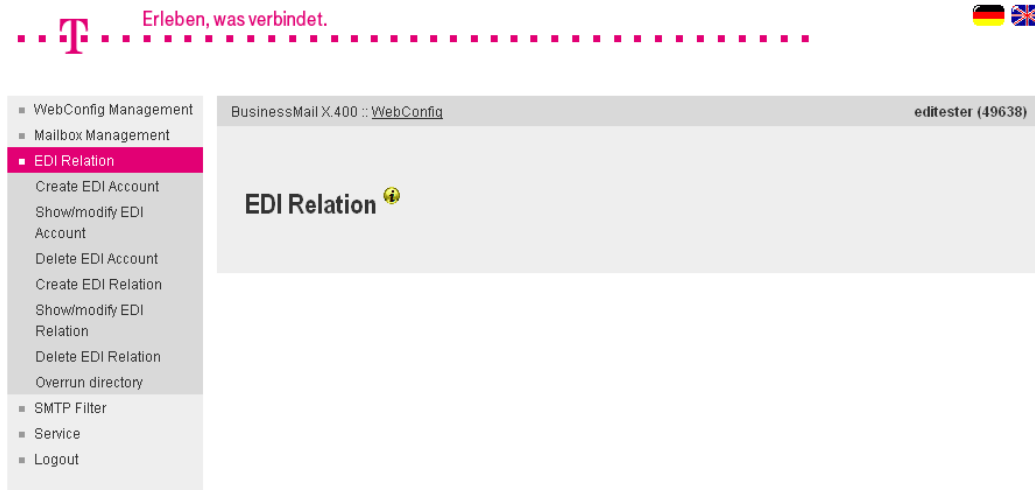

The screenshot shows a web interface for BusinessMail X.400. At the top left is a red dotted line with a 'T' logo. To its right is the slogan 'Erleben, was verbindet.' and two flags (German and UK). Below this is a main menu with several categories: 'WebConfig Management', 'Mailbox Management', 'EDI Relation' (highlighted in red), 'SMTP Filter', 'Service', and 'Logout'. The 'EDI Relation' category is expanded, showing sub-items: 'Create EDI Account', 'Show/modify EDI Account', 'Delete EDI Account', 'Create EDI Relation', 'Show/modify EDI Relation', 'Delete EDI Relation', and 'Overrun directory'. The main content area shows 'BusinessMail X.400 :: WebConfig' and 'editester (49638)' in the top right. The main heading 'EDI Relation' is displayed with a yellow warning icon.

- In this main menu item you may manage (create, show/modify or delete) your own EDI accounts and your EDI relations.




BusinessMail X.400


Web Interface


Trading Partner EDI

EDI Relation – Create an EDI account

Erleben, was verbindet. 

BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Create EDI Account 

EDI Account 

EDI ID

EDI Qualifier

Closed User Group (only configured partner were able to send messages to this EDI Account)

- In this menu item you may configure an own EDI account. One own EDI account has to be configured at minimum.
- It is mandatory to add a value to EDI ID (for example an ILN/GLN) but EDI Qualifier is an optional value.
- When activating Closed User Group, only a configured EDI Trading Partner will be able to deliver a document to this EDI account.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – List and select an EDI account

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Modify EDI Account ⓘ

Select EDI Account

EDI Account
40000066666:14
400004387877:65

- WebConfig Management
- Mailbox Management
- EDI Relation
 - Create EDI Account
 - Show/modify EDI Account
 - Delete EDI Account
 - Create EDI Relation
 - Show/modify EDI Relation
 - Delete EDI Relation
 - Overrun directory
- SMTP Filter
- Service
- Logout

- In this menu item you'll see all configured EDI accounts.
- Select an EDI account via double click to modify the values.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Modify an EDI account



- In this menu item you may change the values of a configured EDI account.

The screenshot shows the 'BusinessMail X.400 :: WebConfig' interface. On the left is a navigation menu with items like 'WebConfig Management', 'Mailbox Management', 'EDI Relation', 'Create EDI Account', 'Show/modify EDI Account' (highlighted), 'Delete EDI Account', 'Create EDI Relation', 'Show/modify EDI Relation', 'Delete EDI Relation', 'Overrun directory', 'SMTP Filter', 'Service', and 'Logout'. The main content area is titled 'EDI Relation :: Modify EDI Account' and contains a form with the following fields:

EDI Account	
EDI ID	40000066666
EDI Qualifier	14
Closed User Group	<input checked="" type="checkbox"/> (only configured partner were able to send messages to this EDI Account)
Created	30.11.2007 16:19:35
Modified	30.11.2007 16:19:35

Notice: When changing EDI Account all related relations will be updated.

Buttons: Ok, Cancel




BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Delete an EDI account

Erleben, was verbindet.

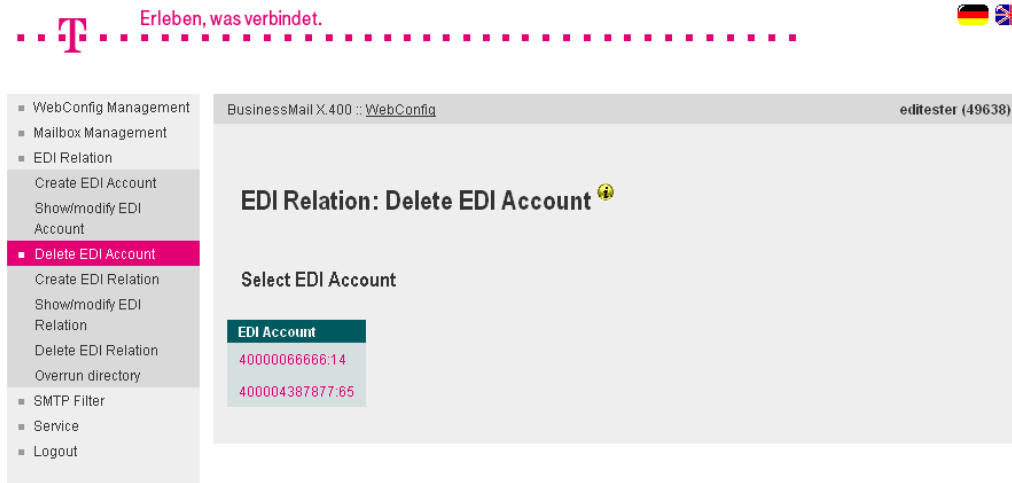

The screenshot shows the BusinessMail X.400 Web Interface. The top navigation bar includes the logo, the slogan "Erleben, was verbindet.", and language flags for German and English. The left sidebar contains a menu with the following items: WebConfig Management, Mailbox Management, EDI Relation, Create EDI Account, Show/modify EDI Account, Delete EDI Account (highlighted in red), Create EDI Relation, Show/modify EDI Relation, Delete EDI Relation, Overrun directory, SMTP Filter, Service, and Logout. The main content area displays the "EDI Relation: Delete EDI Account" dialog box. The dialog box has a title bar "BusinessMail X.400 :: WebConfig" and a user indicator "editester (49638)". The main text reads "EDI Relation: Delete EDI Account" with a warning icon. Below this is the heading "Select EDI Account" and a table with the following data:

EDI Account
40000066666:14
400004387877:65

- In this menu item you may delete a configured EDI account.
- Select an EDI account via double click.
- You have to confirm to delete this EDI account.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Create a new Relation (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Create new Relation

X.400 Partner

User Identification

User ID

X.400 Address

general

SMTP Address

Country (c) ADMD (a) PRMD (p)

X.121 (x121)

UA ID (n-id)

Commonname (cn)

Given name (g) Surname (s)

Generation (q) Initials (i)

Organization (o)

- In this menu item you may configure a new EDI Trading Partner/ EDI Relation.
- In section „X.400 Partner“ you have to add the User ID or the X.400 address of your partner. When entering the address of external Partners you may use special address masks (for example SMTP partner). If you enter a value to “User ID” you are not able to enter X.400 address elements.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Create a new Relation (2)

The screenshot displays the 'EDI Relation' configuration form in the BusinessMail X.400 web interface. The form is divided into several sections:

- Org Unit Selection:** Four input fields labeled 'Org Unit 1 (ou1)', 'Org Unit 2 (ou2)', 'Org Unit 3 (ou3)', and 'Org Unit 4 (ou4)' are arranged in a 2x2 grid.
- Domain defined Attributes (dda):** A section containing four rows, each with a 'Type' input field and a 'Value' input field.
- EDI Properties:** A section with a title bar 'EDI Relation' and a close button. It contains:
 - EDI Account:** A dropdown menu with the value '40000066666:14' selected.
 - Partner EDI ID:** An empty text input field.
 - Partner EDI Qualifier:** An empty text input field.
 - EDI Testflag:** A checkbox that is currently unchecked.
 - X.400 Content Type:** A dropdown menu with 'IPM84', 'IPM88', and 'EDI' as options.
 - Bodypart:** A dropdown menu with 'IA5 Text', 'Bilateral (Bodypart 14)', and 'ISO Latin 1' as options.
 - Comment:** An empty text input field.
- Buttons:** 'OK' and 'Cancel' buttons are located at the bottom left of the form.

- In section „EDI properties“ you have to map this relation to configure EDI account.
- The partner's EDI ID is mandatory when configuring a relation. Optional is to add an EDI Qualifier or to select EDI Test flag (Test flag in UNB will be used for lookup of X.400 address).
- The parameters X.400 Content Type and Bodypart will define the format of X.400 message send to your partner.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Create a new Relation (3)

Org Unit 1 (ou1) Org Unit 2 (ou2)
Org Unit 3 (ou3) Org Unit 4 (ou4)

Domain defined Attributes (dda)

Type Value
Type Value
Type Value
Type Value

EDI Properties

EDI Relation

EDI Account: 40000066666:14
Partner EDI ID:
Partner EDI Qualifier:
EDI Testflag:
X.400 Content Type: IPM84, IPM88, EDI
Bodypart: IA5 Text, Bilateral (Bodypart 14), ISO Latin 1
Comment:

Ok Cancel

- You may add a comment with a maximum length of 64 characters to this relation entry. The content of this comment will be used by filter mechanism within select relation menu (modify, delete).




BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Select and modify a Relation

Erleben, was verbindet.

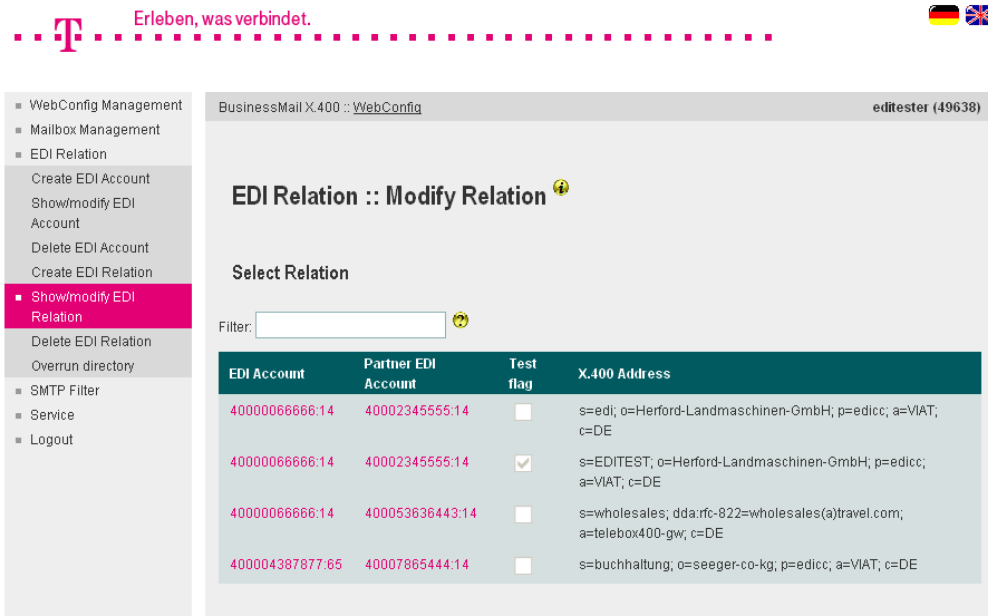

The screenshot shows the 'EDI Relation :: Modify Relation' page in the BusinessMail X.400 web interface. The page title is 'EDI Relation :: Modify Relation' with a help icon. Below the title is a 'Select Relation' section with a search filter. The filter contains the text 'Filter:'. Below the filter is a table with four columns: 'EDI Account', 'Partner EDI Account', 'Test flag', and 'X.400 Address'. The table contains four rows of data. The second row is selected, indicated by a checkmark in the 'Test flag' column.

EDI Account	Partner EDI Account	Test flag	X.400 Address
40000066666:14	40002345555:14	<input type="checkbox"/>	s=edi; o=Herford-Landmaschinen-GmbH; p=edicc; a=VIAT; c=DE
40000066666:14	40002345555:14	<input checked="" type="checkbox"/>	s=EDITEST; o=Herford-Landmaschinen-GmbH; p=edicc; a=VIAT; c=DE
40000066666:14	40005363644:14	<input type="checkbox"/>	s=wholesales; dda.rfc-822=wholesales(a)travel.com; a=telebox400-gw; c=DE
400004387877:65	40007865444:14	<input type="checkbox"/>	s=buchhaltung; o=seeger-co-kg; p=edicc; a=VIAT; c=DE

- In this menu item you'll see all EDI relations configured for your EDI account.
- When entering a search string you will reduce the number of displayed entries. The search mechanism will also consider the comments added to the relation entries.
- Select an EDI relation via double click to modify the values.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Modify a Relation (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Modify Relation

Create copy

X.400 Partner

User Identification

User ID 49649

X.400 Address

Country (c)	<input type="text" value="DE"/>	ADMD (a)	<input type="text" value="VIAT"/>	PRMD (p)	<input type="text" value="edicc"/>
X.121	(x121)	<input type="text"/>			
UA ID	(n-id)	<input type="text"/>			
Commonname	(cn)	<input type="text"/>			
Given name	(g)	<input type="text"/>	Surname (s)	<input type="text" value="EDITEST"/>	
Generation	(q)	<input type="text"/>	Initials (i)	<input type="text"/>	
Organization	(o)	<input type="text" value="Herford-Landmaschine"/>			
Org Unit 1	(ou1)	<input type="text"/>	Org Unit 2 (ou2)	<input type="text"/>	

- In this menu item you may modify the values of selected EDI relation (X.400 address or EDI parameter).
- You may use the values of this relation to create a new relation while selecting “Create copy” (for example to map the relation to an other EDI account).

BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Modify a Relation (2)

The screenshot displays the 'EDI Relation :: Modify Relation' web interface. The left sidebar contains a navigation menu with options like 'WebConfig Management', 'Mailbox Management', and 'EDI Relation'. The main content area shows the 'X.400 Partner' details for user 'editester (49638)'. The form includes sections for 'User Identification' (User ID: 49647), 'X.400 Address' (Country: DE, ADMID: TELEBOX400-GW), and 'Domain defined Attributes (dda)' (Type: rfc-822, Value: wholesales(a)travel.com). The 'Surname' field is pre-filled with 'wholesales'.

- EDI Trading Partner who is not using X.400 service → SMTP Gateway.
- While changing the SMTP address in DDA value (please use “(a) instead of “@”) you have to change in parallel the value of Surname and if used also Given name.




BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Delete a Relation

Erleben, was verbindet.



BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Delete Relation ⓘ

Select Relation

Filter:

EDI Account	Partner EDI Account	Test flag	X.400 Address
40000066666:14	40002345555:14	<input type="checkbox"/>	s=edi; o=Herford-Landmaschinen-GmbH; p=edicc; a=VIAT; c=DE
40000066666:14	40002345555:14	<input checked="" type="checkbox"/>	s=EDITEST; o=Herford-Landmaschinen-GmbH; p=edicc; a=VIAT; c=DE
40000066666:14	40005363644:14	<input type="checkbox"/>	s=wholesales; dda.rfc-822=wholesales(a)travel.com; a=telebox400-gw; c=DE
40000438787:65	40007865444:14	<input type="checkbox"/>	s=buchhaltung; o=seeger-co-kg; p=edicc; a=VIAT; c=DE

- In this menu item you may delete a configured EDI relation.
- Select an EDI relation via double click to delete this entry.
- You have to confirm to delete this EDI relation.




BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Overrun directory (1)

Erleben, was verbindet.

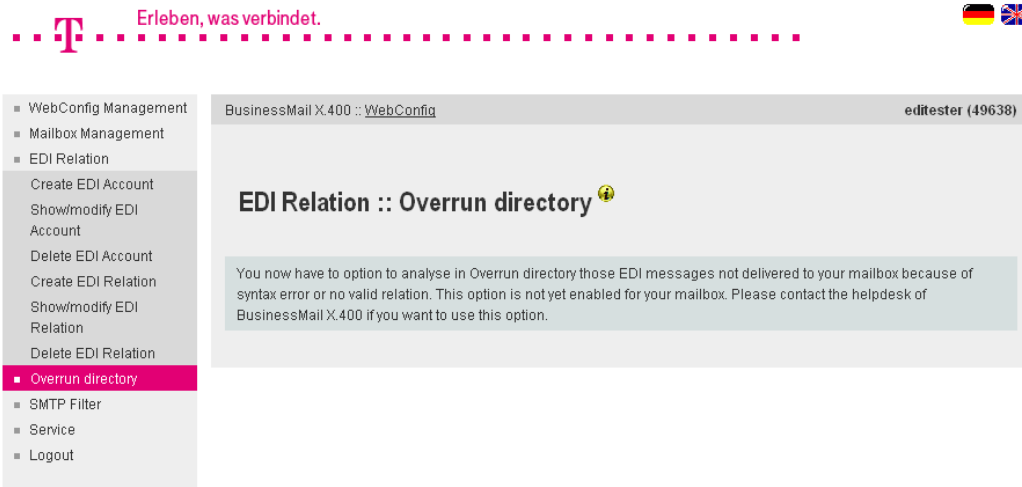

The screenshot shows the BusinessMail X.400 WebConfig interface. The left sidebar contains a navigation menu with the following items: WebConfig Management, Mailbox Management, EDI Relation, Create EDI Account, Show/modify EDI Account, Delete EDI Account, Create EDI Relation, Show/modify EDI Relation, Delete EDI Relation, **Overrun directory** (highlighted in pink), SMTP Filter, Service, and Logout. The main content area displays the title 'EDI Relation :: Overrun directory' with a warning icon. Below the title, a message states: 'You now have to option to analyse in Overrun directory those EDI messages not delivered to your mailbox because of syntax error or no valid relation. This option is not yet enabled for your mailbox. Please contact the helpdesk of BusinessMail X.400 if you want to use this option.'

- Here you'll find informations about those messages not delivered to your EDIBOX because of syntax errors or an invalid relation configuration.
- If this feature is not enabled for your EDIBOX, you'll see an information how to enable it.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Overrun directory (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Overrun directory ⚠

Filter:

Time stamp	MPDU ID	Action items
no messages stored in Overrun directory		

- If this feature is enabled and there are no refused messages, you'll see this information.
- The entries of those messages older than 6 weeks will be deleted automatically.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Overrun directory (3)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

EDI Relation :: Overrun directory

Filter:

Time stamp	MPDU ID	Action items
04.06.2010 13:17:27	C=DE; A=VIAT-TEST; P=; L=85673A5911DF6FDB0000FA83	H [icon] [icon]
04.06.2010 13:17:27	Originator: G=ipm, S=testniv, o=ntag; A=viaT-test; C=de	FDB0000FB83 H [icon] [icon]
04.06.2010 13:19:50	Subject: test text	FDB00006A87 H [icon] [icon]
04.06.2010 13:19:50	MPDU ID: C=DE; A=VIAT-TEST; P=; L=85673A5911DF6FDB0000FA83	6FDB00006C87 H [icon] [icon]
04.06.2010 13:20:30	Message ID: 140509401	FDB000008B9 H [icon] [icon]
04.06.2010 13:20:30	Sent: 04.06.2010 13:17:27	FDB000009B9 H [icon] [icon]
04.06.2010 13:20:30	Received: 04.06.2010 13:17:27	FDB000009B9 H [icon] [icon]
04.06.2010 13:20:30	Reason code: 1="unable to transfer"	FDB000009B9 H [icon] [icon]
04.06.2010 13:20:30	Diagnostic code: 11="invalid arguments"	
04.06.2010 13:20:30	Bodypart: ISO-Latin-1	
04.06.2010 13:20:30	Size: 1 kb	

- For each message not delivered to your EDIBOX, you'll find an entry in this menu item. If you move the mouse pointer to one of those entries, the header information of this message will be displayed in separate window.
- While pressing one of those action button available for each message, you may download the first body part, view extended message details, or delete this entry.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Overrun directory (4)

Message Details	
Originator	G=ipm; S=testnrv; o=dtag; A=viaT-test; C=de
Subject	test text
MPDU ID	C=DE; A=VIAT-TEST; P=; L=857F379E11DF6FDB0000FB83
Message ID	140509403
Sent	04.06.2010 13:17:27
Received	04.06.2010 13:17:27
Reason code	1="unable to transfer"
Diagnostic code	11="invalid arguments"
Bodypart	IA5-Text
Size	1 kb

```
!OMS-CDIF-INFORMATION:  
!FILENAME: MailtoEDI_Falsch_IDETS.txt  
!COMMENT: Unknown File Type  
!Information for the next bodypart
```

- If you press the action button „Details“, you’ll see the extended header information and the first lines of body part. In most cases you’ll be able to qualify the problem based on this information (in example the originator had send the EDIFACT document as an FTBP which was converted by MTA to CDIF text body part and a binary body part). If not you have to download the whole body part for further study.



BusinessMail X.400

Web Interface

Trading Partner EDI

EDI Relation – Overrun directory (5)

Message Details	
Originator	G=ipm; S=testmiv; o=dtag; A=viaT-test; C=de
Subject	test text
MPDU ID	C=DE; A=VIAT-TEST; P=; L=85673A5911DF6FDB0000FA83
Message ID	140509401
Sent	04.06.2010 13:17:27
Received	04.06.2010 13:17:27
Reason code	1="unable to transfer"
Diagnostic code	11="invalid arguments"
Bodypart	ISO-Latin-1
Size	1 kb

dfskjkhjghjfgfhjkhgfhjkd
dfskjkhjghjfgfhjkhgfhjkd

- In header information of message one parameter describes the type of first body part. If the first body part is an ISO-Latin 1 body part, also the escape sequences set in front of user data will be displayed .
- The parameter Message ID does not show a value that is a part of X.400 message or of EDI document. This ID is used by Message Store and will help the Helpdesk of BusinessMail X.400 to identify the message.




BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter

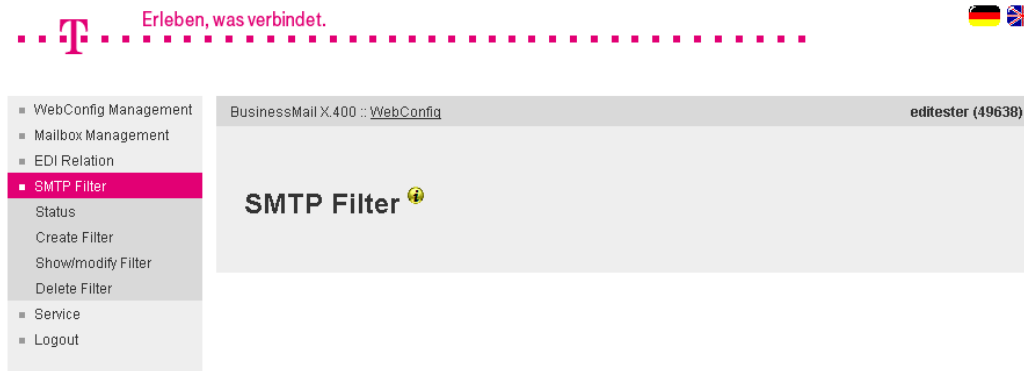

- In this main menu item, you have the option to define whether EDIFACT documents send by Internet mail user will be delivered to your EDIBOX account.
- If you do not have any Trading Partner using Internet mail, we recommend to set the Status “Disabled” also there is only a small chance to receive a “SPAM” EDIFACT document.




BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter - Status

Erleben, was verbindet.

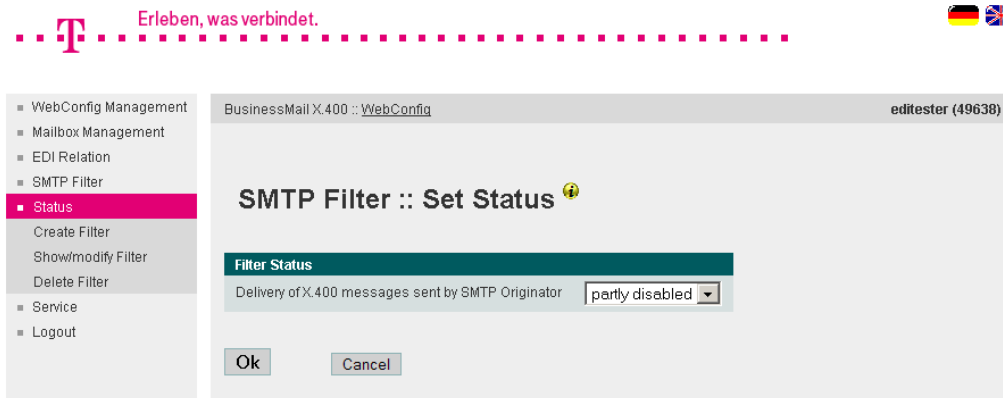

The screenshot shows the BusinessMail X.400 Web Interface. The left sidebar contains a navigation menu with the following items: WebConfig Management, Mailbox Management, EDI Relation, SMTP Filter, Status (highlighted in red), Create Filter, Show/modify Filter, Delete Filter, Service, and Logout. The main content area is titled "SMTP Filter :: Set Status" and features a "Filter Status" section. Below this section, there is a label "Delivery of X.400 messages sent by SMTP Originator" followed by a dropdown menu currently set to "partly disabled". At the bottom of the configuration area, there are "Ok" and "Cancel" buttons. The top right of the interface shows the user "editester (49638)" and flags for Germany and the United Kingdom.

- You may configure whether the delivery of Internet mail is:
 - enabled (deliver all)
 - partly disabled (allowed only for configured partners)
 - verify also the X.400 address in configured relation
RFC-822= x.x(a)x.x
 - disabled (do not deliver mails)




BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter – Create Filter Rule

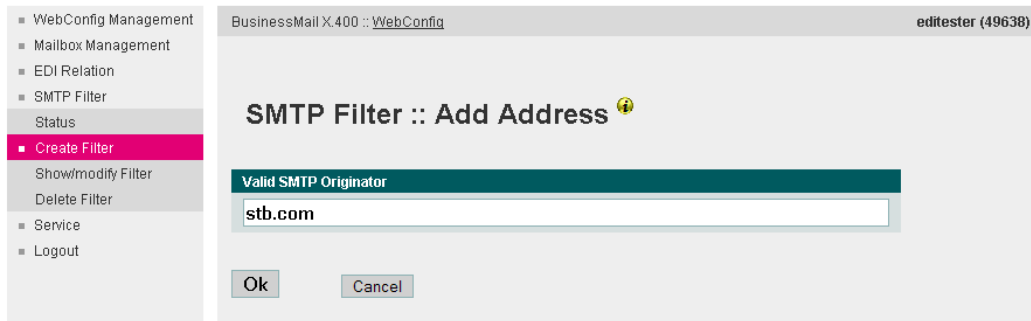

- In this menu item you may configure a filter rule (SMTP address or part of it). The Status has to be set to “partly disabled” to enable this rule. Please use “@” in complete SMTP address (see “Modify Filter Rule”)!



BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter – List Filter Rules (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

SMTP Filter :: Modify Address

Select SMTP Originator

Filter:

SMTP Originator
wholesales@travel.com

- In this menu item you'll see all filter rules configured for your EDIBOX account.
- While entering a search string you may reduce the number of displayed entries.



BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter – List Filter Rules (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig editester (49638)

SMTP Filter :: Modify Address ⓘ

To modify SMTP address will have no influence at the moment because the filter is not set to "block partly". You may change this in Status menu.

Select SMTP Originator

Filter: ⓘ

SMTP Originator

wholesales@travel.com

- If the Status is not “partly disabled” you’ll see an information that the rules will not be used.




BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter – Modify Filter Rule

Erleben, was verbindet.

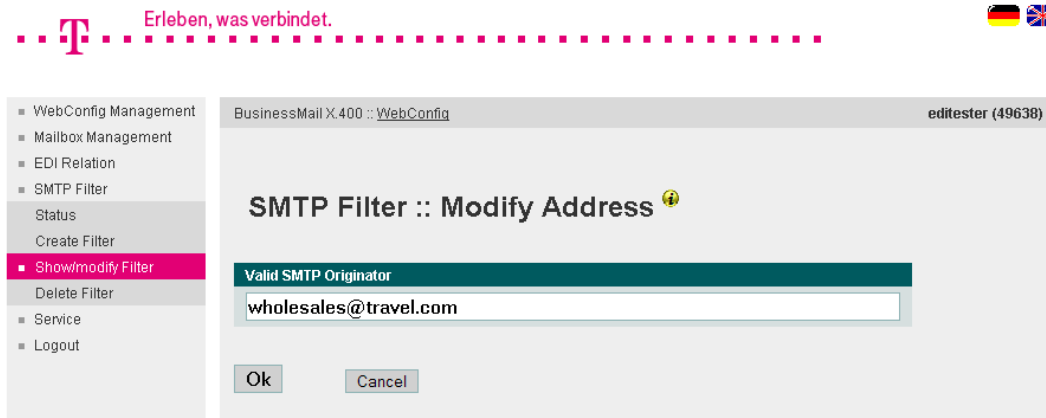

BusinessMail X.400 :: WebConfig editester (49638)

SMTP Filter :: Modify Address

Valid SMTP Originator

wholesales@travel.com

Ok Cancel

- In this menu item you have the possibility to modify a filter rule.
- This example shows the complete SMTP address of trading partner.




BusinessMail X.400

Web Interface

Trading Partner EDI

SMTP Filter – Delete Filter Rule

Erleben, was verbindet.

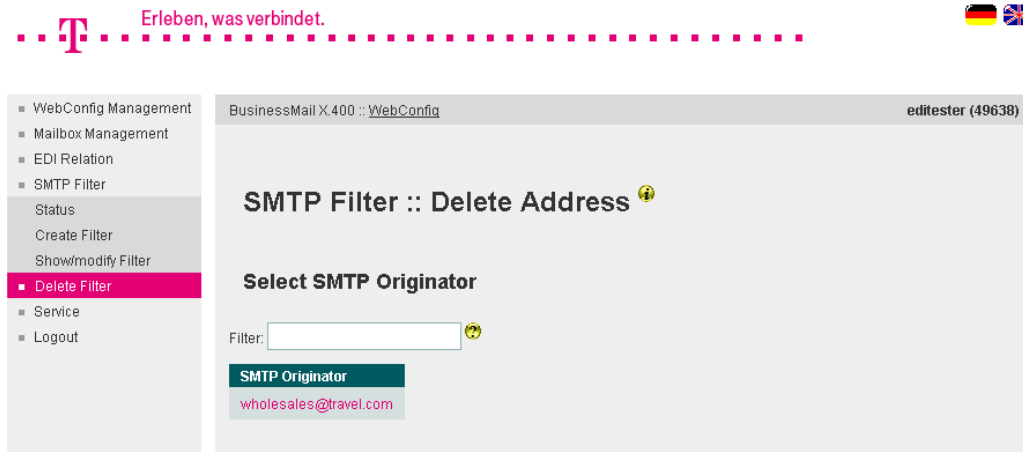

BusinessMail X.400 :: WebConfig editester (49638)

SMTP Filter :: Delete Address

Select SMTP Originator

Filter:

SMTP Originator
wholesales@travel.com

- In this menu item you may delete a configured filter rule.
- Select a filter rule via double click to delete this entry.
- You have to confirm to delete this filter rule.




BusinessMail X.400

Web Interface

Trading Partner EDI

Service

••T••Systems• Business flexibility

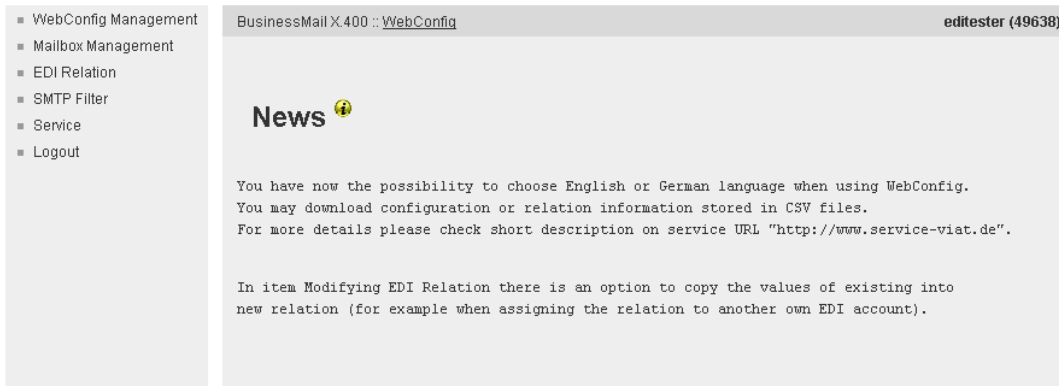

BusinessMail X.400 :: WebConfig editester (49638)

News

You have now the possibility to choose English or German language when using WebConfig.
You may download configuration or relation information stored in CSV files.
For more details please check short description on service URL "<http://www.service-viat.de>".

In item Modifying EDI Relation there is an option to copy the values of existing into new relation (for example when assigning the relation to another own EDI account).

- In this main menu item you'll see the status of Business-Mail X.400 system and some other information as soon as possible. At the moment you still find this information on Service URL <http://www.service-viat.de>.





Thank You!

Erleben, was verbindet.

